


Plan View - Bottom Apron Reinforcing
(Curtain Wall Reinforcing not shown, See Sheet TRPWH 30-2-20)

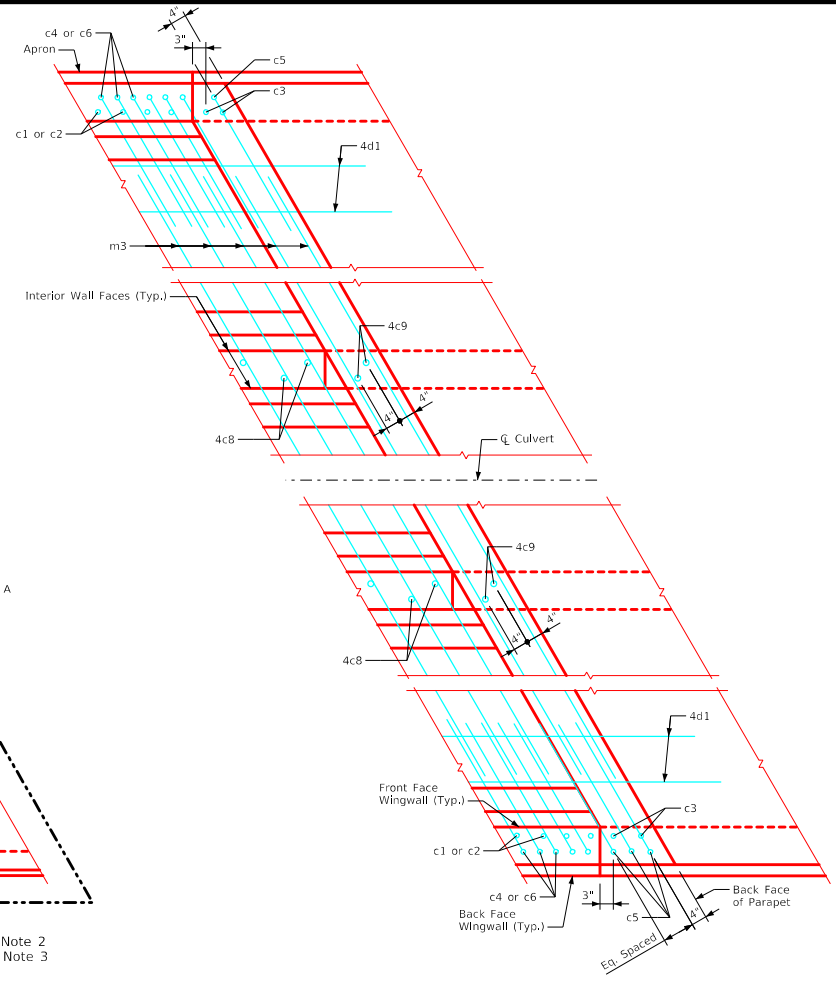

DETAIL A

Notes:

1. Bar spacings and positions shown are similar for all sizes of headwalls in this standard.
2. Not applicable for 4' & 5' height headwalls.
3. Not applicable for 4' thru 8' height headwalls.
4. For headwall dimensions and bar spacing see Sheet TRPWH 30-1-20.
5. Apron m3 bars are to be centered on CUL culvert.
6. B.F.V. (c5), F.F.V. (c3) and interior wall both F.V. (c9) bars are approximately 4" from the back of parapet for all headwalls.

* - See Note 2
Δ - See Note 3

LATEST REVISION DATE	APPROVED BY BRIDGE ENGINEER		
		Standard Design - Triple Reinforced Concrete Box Culverts	
		Parallel Wing Headwalls	
		July, 2020	
		Bottom Apron Reinforcing 30° Skew	TRPWH 30-4-20