


**PLAN VIEW OF BRIDGE BERM
(BARNROOF FORESLOPE)**

Grading surface:
Refer to berm slope location table in project plans
for locations of A, B, W and possible other points.


- ① Variable slope.
- ② Bridge Berm slope may vary and is determined by the A and B points. Slope is normally 2.5:1 or flatter.
- ③ Refer to contract documents for limits of the slope protection.

IOWA DOT	REVISION	
	4	04-19-16
STANDARD ROAD PLAN		EW-201
		SHEET 1 of 3
<small>REVISIONS: Changed reference from RK series to BR series in circle note 4.</small>		
<i>Brian Smith</i> <small>APPROVED BY DESIGN METHODS ENGINEER</small>		
BRIDGE BERM GRADING WITHOUT RECOVERABLE SLOPE (BARNROOF SECTION)		

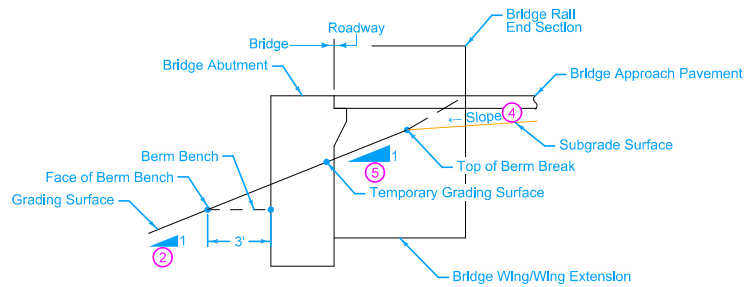


SECTION C-C

- ② Bridge Berm slope may vary and is determined by the A and B points.
 - ③ Refer to contract documents for limits of the slope protection.
 - ④ Refer to **BR series** for longitudinal subgrade slope.
 - ⑤ Temporary grading slope.
- g = Pavement cross slope.

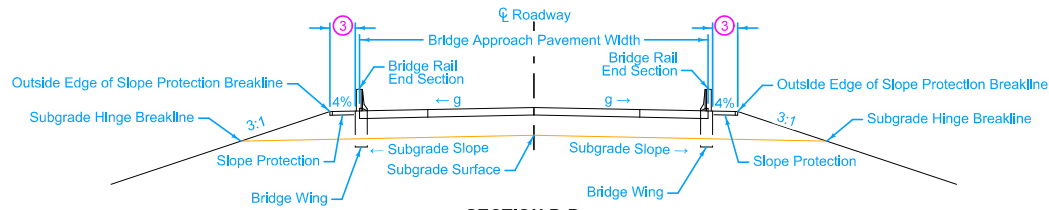

SECTION B-B

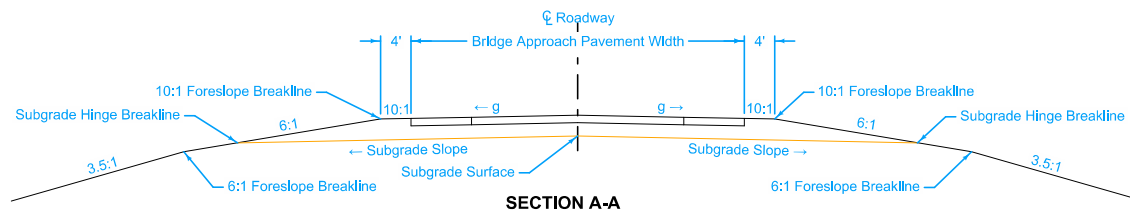


SECTION A-A

	REVISION
	4 04-19-16
STANDARD ROAD PLAN	EW-201
SHEET 2 of 3	
REVISIONS: Changed reference from RK series to BR series in circle note 4.	
 APPROVED BY DESIGN METHODS ENGINEER	
BRIDGE BERM GRADING WITHOUT RECOVERABLE SLOPE (BARNROOF SECTION)	

This image can be viewed in 3D on the the ERL or at our website <http://www.iowadot.gov/design/stdrdpln.htm>



This image can be viewed in 3D on the the ERL or at our website <http://www.iowadot.gov/design/stdrdpln.htm>

 STANDARD ROAD PLAN	REVISION	4	04-19-16
	EW-201 SHEET 3 of 3		
<small>REVISIONS: Changed reference from RK series to BR series in circle note 4.</small>			
<i>Brian Smith</i> <small>APPROVED BY DESIGN METHODS ENGINEER</small>			
BRIDGE BERM GRADING WITHOUT RECOVERABLE SLOPE (BARNROOF SECTION)			