


DESIGNER INFORMATION

For line information, see [PM-110](#).


For projects not on the Primary system the following substitutions may be made. See plan sheets for substitutions.

ELW6 → ELW4
 CHY10 → CHY8
 NPY6 → NPY4
 BCY6 → BCY4
 DCY6 → DCY4

① If less than 400 feet, join solid yellow lines.

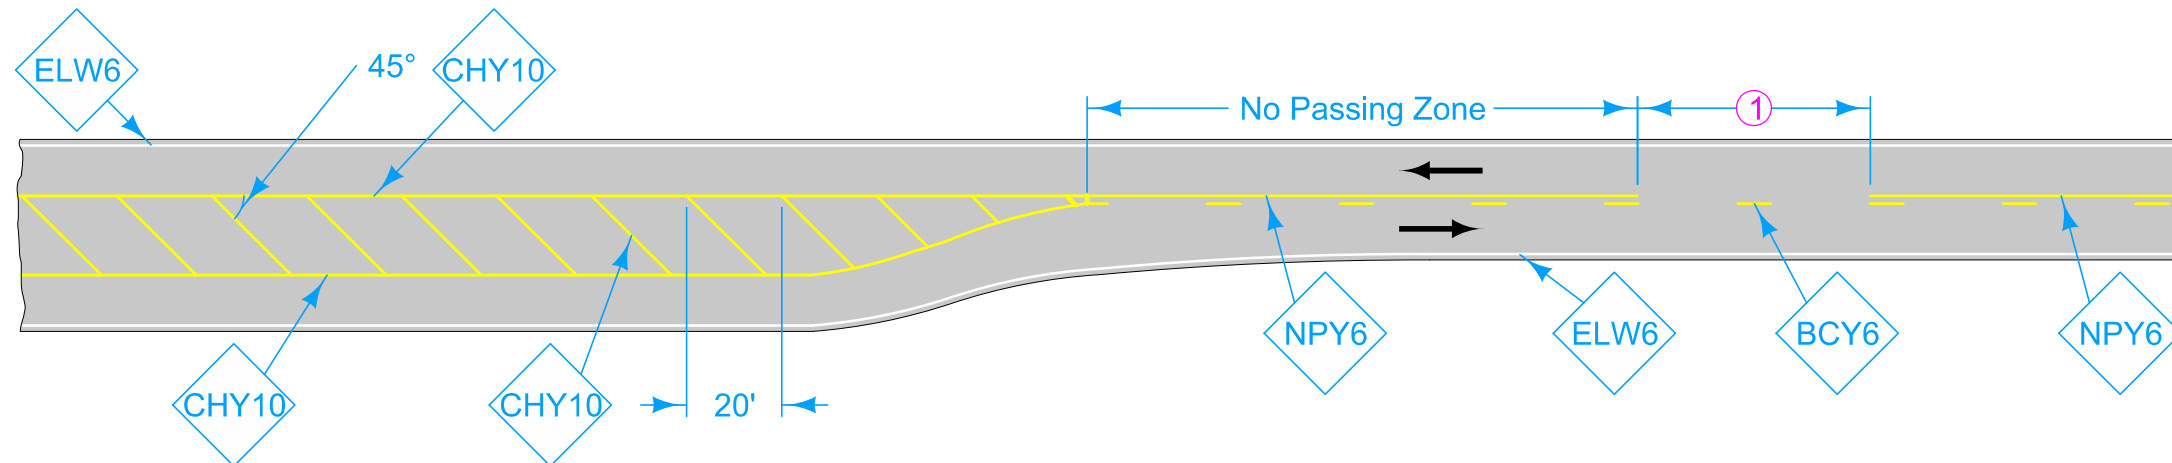

OFFSET ALL TO ONE SIDE

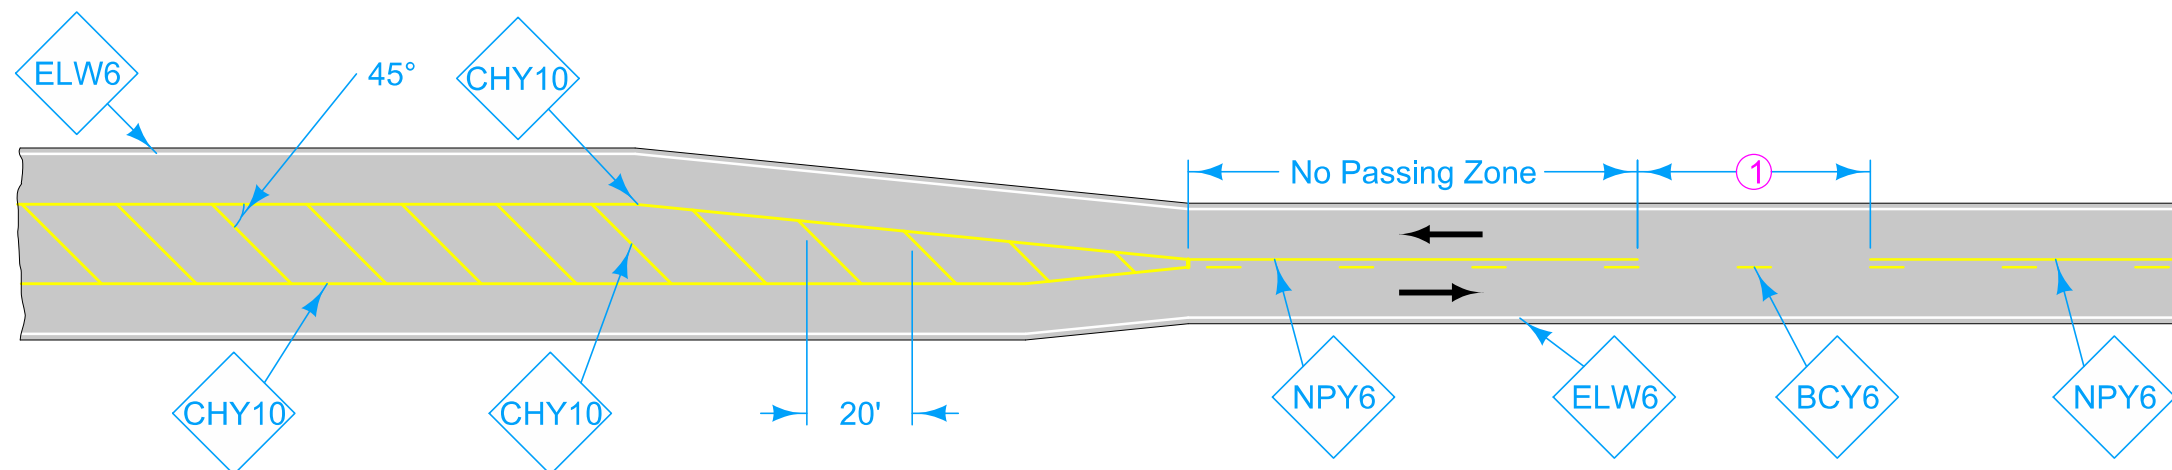

OFFSET SPLIT BETWEEN SIDES

FLUSH MEDIANS

Speed (mph)	Length of No Passing Zone
20	300'
25	300'
30	360'
35	360'
40	480'
45	480'
50	600'
55	600'


LEGEND

- Centerline Extension
- ← Direction of Traffic
- BCY6 Broken Centerline (Yellow)
- CHY10 Channelizing Line (Yellow)
- ELW6 Edge Line Right (White)
- NPY6 No Passing Zone Line (Yellow)


Possible Contract Item:
 Pavement Marking Line Items

Possible Tabulation:
[108-22](#)

	REVISION	
	4	10-15-24
STANDARD ROAD PLAN		PM-210
REVISIONS: Modified line widths from 4 inches and 8 inches to 6 inches and 10 inches.		SHEET 1 of 2
 APPROVED BY DESIGN METHODS ENGINEER		
SEPARATION IN TWO-LANE ROADWAY		

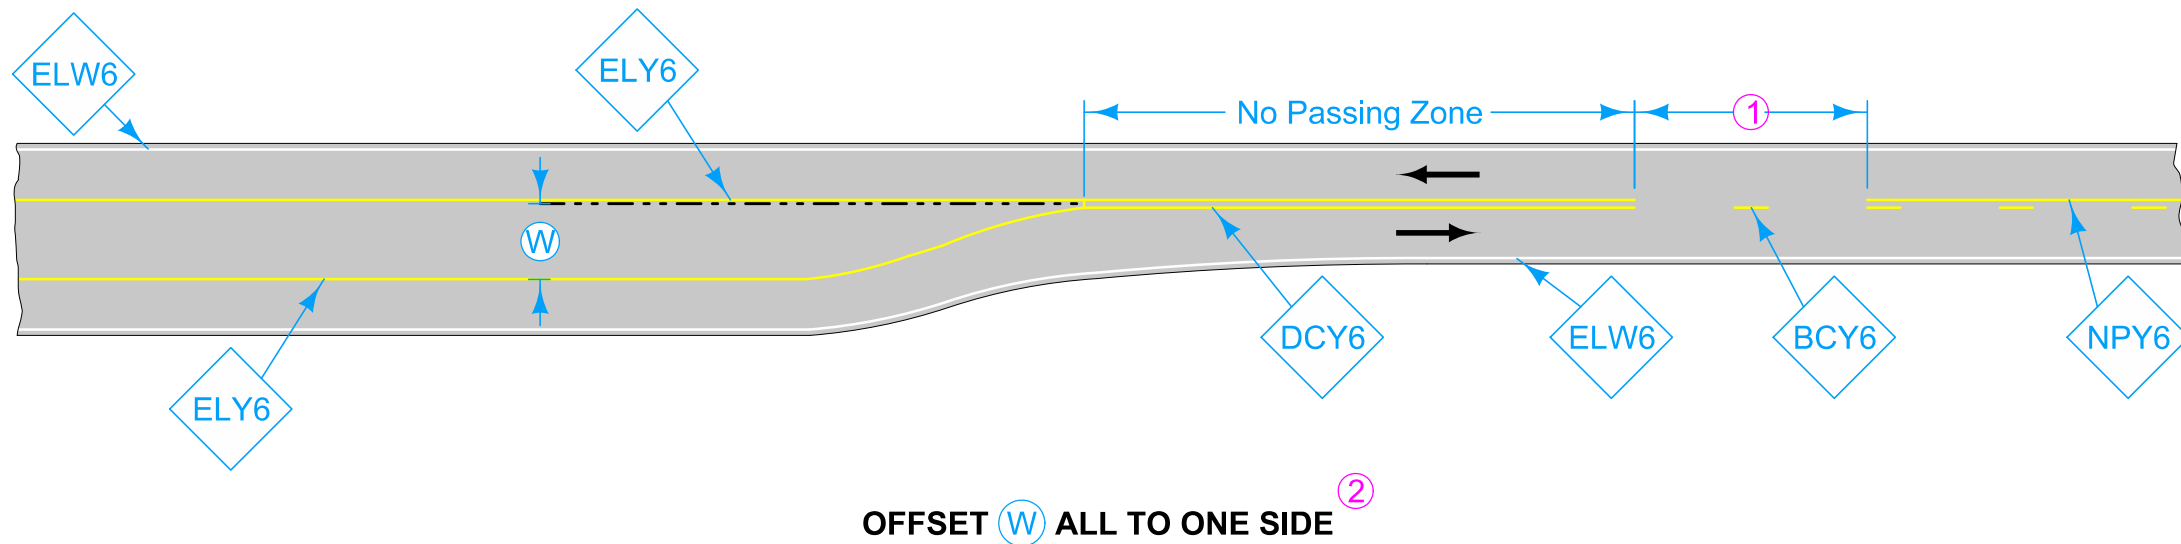

OFFSET W ALL TO ONE SIDE ^②

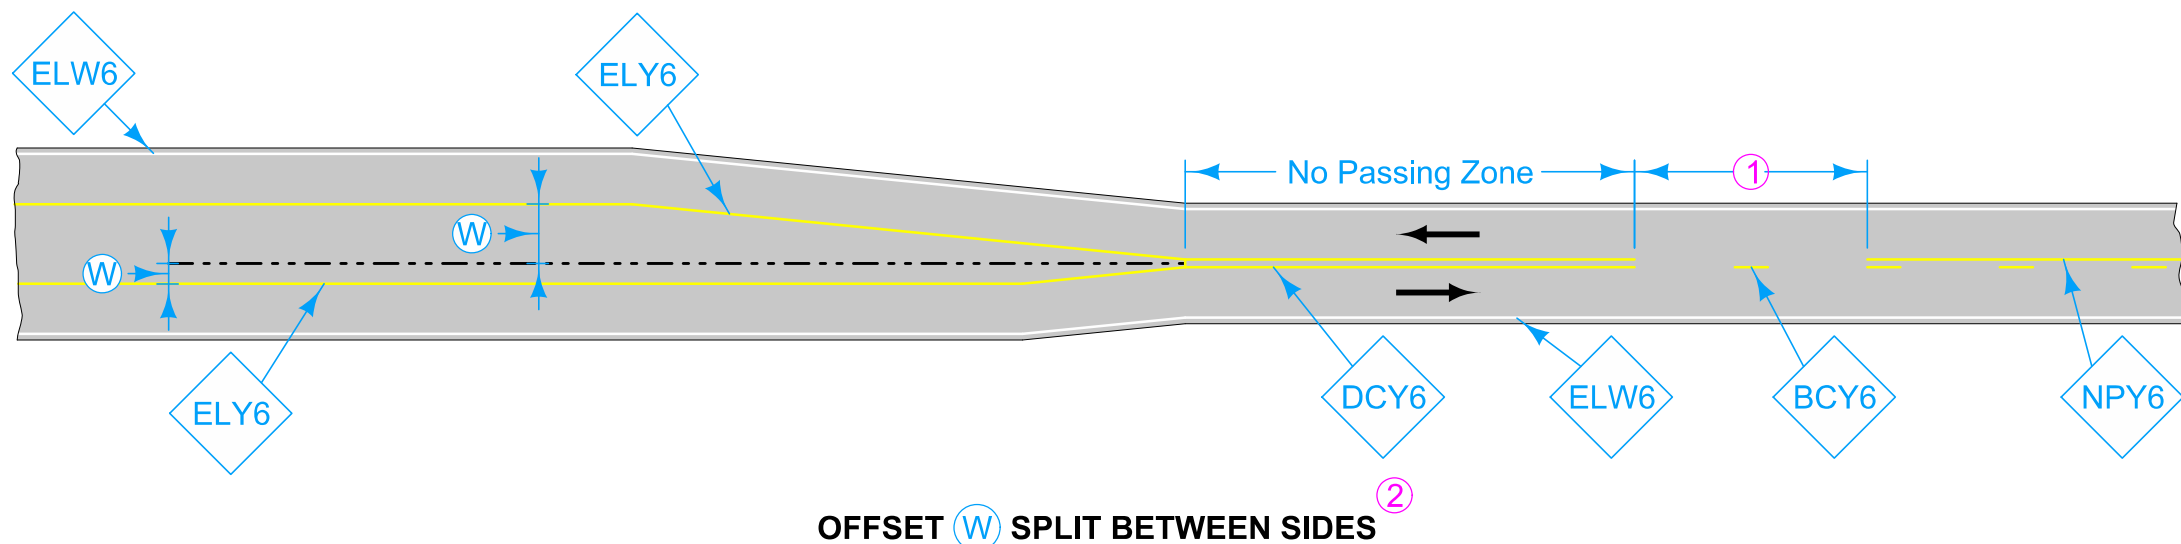

OFFSET W SPLIT BETWEEN SIDES ^②

RAISED MEDIANS

Paint the edge line along the taper and 50 feet of the parallel curbing. If the distance between edge lines is 100 feet or less, connect them.

^① If less than 400 feet, join solid yellow lines.

^② The offset distance from centerline, W , can be either the entire width of the offset if the offset is all to one side, or it is the larger of the two partial offsets if the entire width of the offset is split between the two directions of traffic. Measure W from the midpoint of the centerline to the outside edge of the painted curb.

LEGEND			
-----	Centerline Extension	ELW6	Edge Line Right (White)
←	Direction of Traffic	NPY6	No Passing Zone Line (Yellow)
BCY6	Broken Centerline (Yellow)	ELY6	Edge Line Left (Yellow)
DCY6	Double Centerline (Yellow)		

Speed (mph)	Length of No Passing Zone					
	W = offset distance from centerline					
	6'	8'	10'	12'	14'	16'
25	200	200	210	250	300	340
35	250	330	410	490	580	660
45	540	720	900	1080	1260	1440
55	660	880	1100	1320	1540	1760
65	780	1040	1300	1560	1820	2080

	REVISION
	4 10-15-24
STANDARD ROAD PLAN	PM-210
REVISIONS: Modified line widths from 4 inches and 8 inches to 6 inches and 10 inches.	SHEET 2 of 2
 APPROVED BY DESIGN METHODS ENGINEER	
SEPARATION IN TWO-LANE ROADWAY	