






CLASS A SIDEWALK CURB RAMP

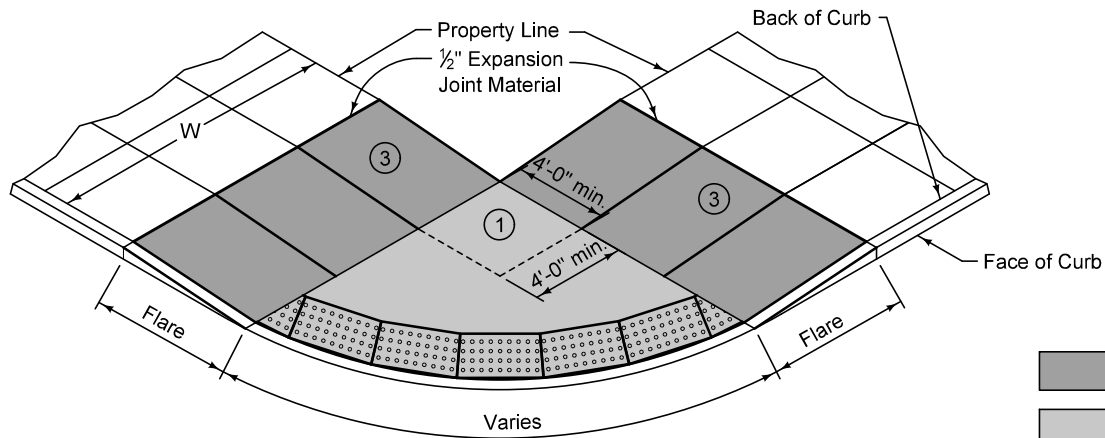

CLASS A SIDEWALK CURB RAMP ALTERNATIVE

- Key
-  Curb Ramp
 -  Turning Space
 -  Detectable Warning

- ① Turning Space: Target slope of 1.5% with maximum slope perpendicular to the travel direction of 2.0%. Minimum 4 feet by 4 feet (turning spaces may overlap).
- ② Perpendicular Curb Ramp: Target running slope of 6.25% with maximum running slope of 8.3%.
- ③ Parallel Curb Ramp: Target running slope of 6.25% with maximum running slope of 8.3%. The length of the parallel ramp is not required to exceed 15 feet, regardless of the resulting slope. Do not exceed 8.3% for parallel ramps shorter than 15 feet.

	REVISION New 10-16-12
	7030.209
	SHEET 1 of 1
SUDAS Standard Specifications	
CURB RAMPS FOR CLASS A SIDEWALK	