


REVISED 03-2016 - REVISION FOR ADDITION OF PAVING NOTCH BAR 8u1.

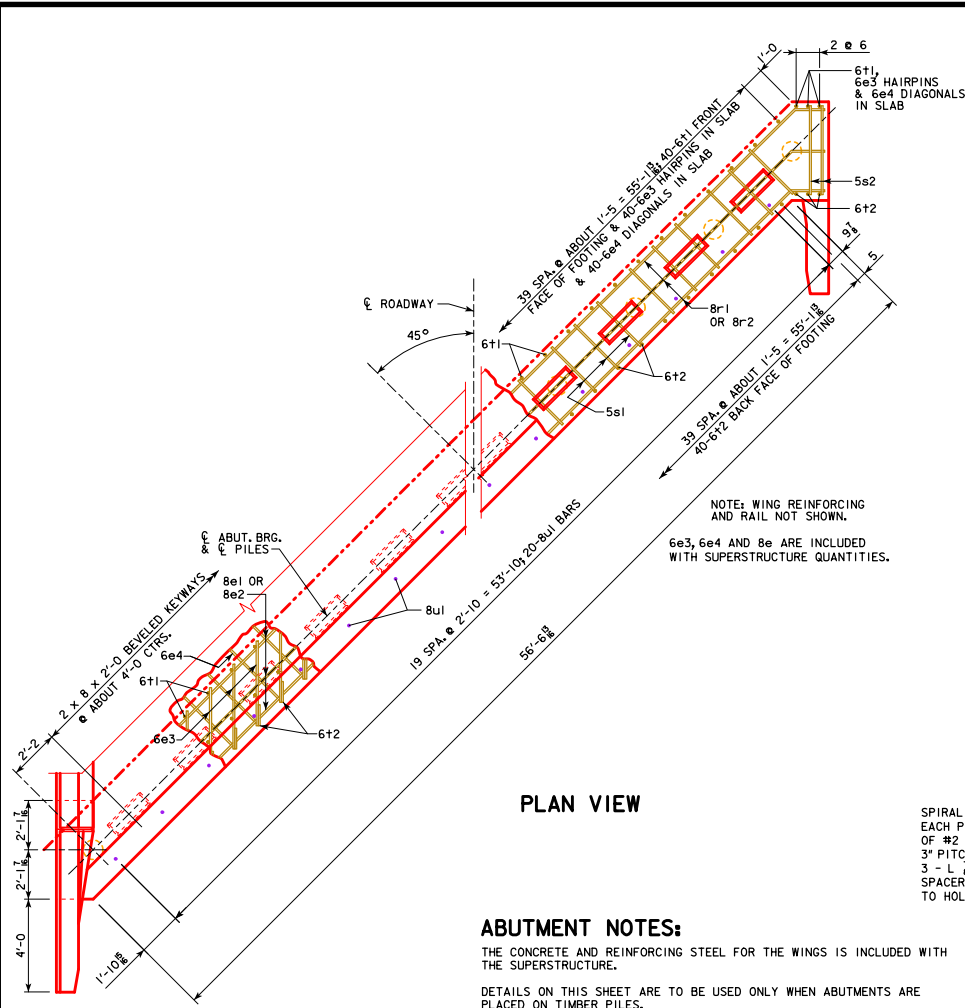

PLAN VIEW

ABUTMENT NOTES:

THE CONCRETE AND REINFORCING STEEL FOR THE WINGS IS INCLUDED WITH THE SUPERSTRUCTURE.


DETAILS ON THIS SHEET ARE TO BE USED ONLY WHEN ABUTMENTS ARE PLACED ON TIMBER PILES.

THE MINIMUM CLEAR DISTANCE FROM THE FACE OF THE CONCRETE TO NEAR REINFORCING BAR IS TO BE 2 INCHES UNLESS OTHERWISE NOTED OR SHOWN.
TIMBER PILES SHALL BE DRIVEN TO FULL PENETRATION IF PRACTICABLE BUT IN NO CASE TO A BEARING VALUE LESS THAN SHOWN IN DESIGN PLANS. TIMBER PILES SHALL NOT BE DRIVEN TO MORE THAN 160 TONS.

ALL REINFORCING STEEL IS TO BE GRADE 60.


ABUTMENT PILING WAS DESIGNED FOR HL-93 LOADING WITH AN ALLOWANCE FOR 20 LBS. PER SQ. FT. FUTURE WEARING SURFACE.

NOTE: WING REINFORCING AND RAIL NOT SHOWN.
6e3, 6e4 AND 8e ARE INCLUDED WITH SUPERSTRUCTURE QUANTITIES.

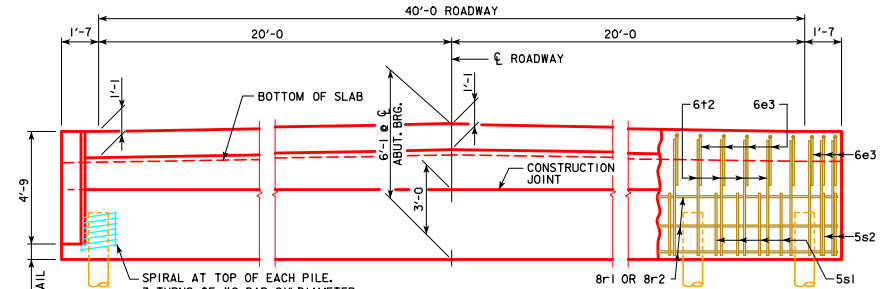


REAR ELEVATION

NOTE: THE BOTTOM OF FOOTING IS TO BE SLOPED TO COMPENSATE FOR GRADE ON THIS SKEWED ABUTMENT. THEREFORE BOTTOM OF FOOTING ELEVATIONS WILL BE REQUIRED AT EACH EXTERIOR PILE.




SECTION NORMAL TO ABUTMENT AT CL

SPIRAL AT TOP OF EACH PILE. 7 TURNS OF #2 BAR, 21" DIA., 3" PITCH, WITH 3 - L 7/8 x 3/8 x 1/2 SPACERS PUNCHED TO HOLD SPIRAL

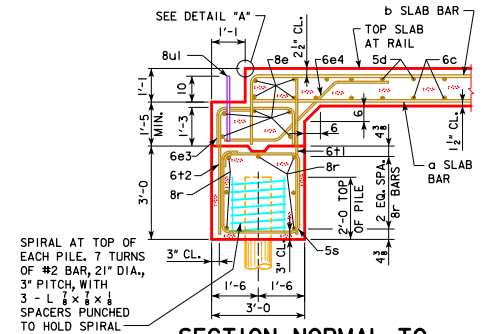

SECTION NORMAL TO ABUTMENT AT GUTTERLINE

SPIRAL AT TOP OF EACH PILE. 7 TURNS OF #2 BAR, 21" DIA., 3" PITCH, WITH 3 - L 7/8 x 3/8 x 1/2 SPACERS PUNCHED TO HOLD SPIRAL



DETAIL "A"

LATEST REVISION DATE 03-2016 APPROVED BY BRIDGE ENGINEER <i>Norman E. McQuill</i>		
	STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES CONTINUOUS CONCRETE SLAB BRIDGES JULY, 2014	
	45° ABUTMENT DETAILS SKEW - TIMBER PILING	J40-36-14