



PART LONGITUDINAL SECTION NEAR GUTTER

NOTE:
 PLUG 3" PVC PIPE WITH
 EXPANDING FOAM PRIOR
 TO BACKFILLING BEHIND
 ABUTMENTS.

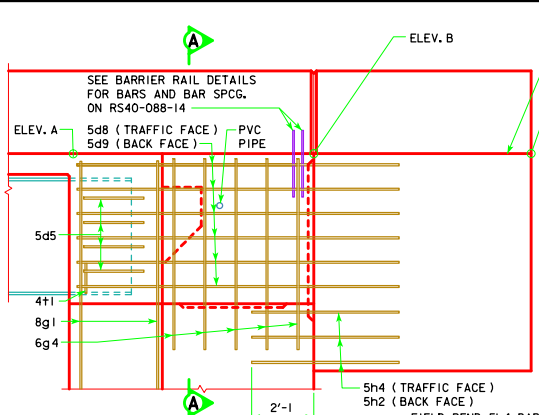


PART END VIEW AT ABUTMENT

NOTE:
 FOR ELEVATION A, ELEVATION B, ELEVATION C AND
 DIMENSION C SEE "MISCELLANEOUS DETAILS"
 FOR THE APPROPRIATE LENGTH BRIDGE.

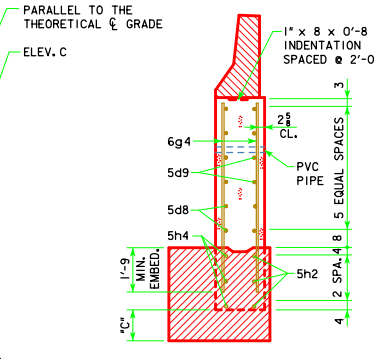


SECTION A-A

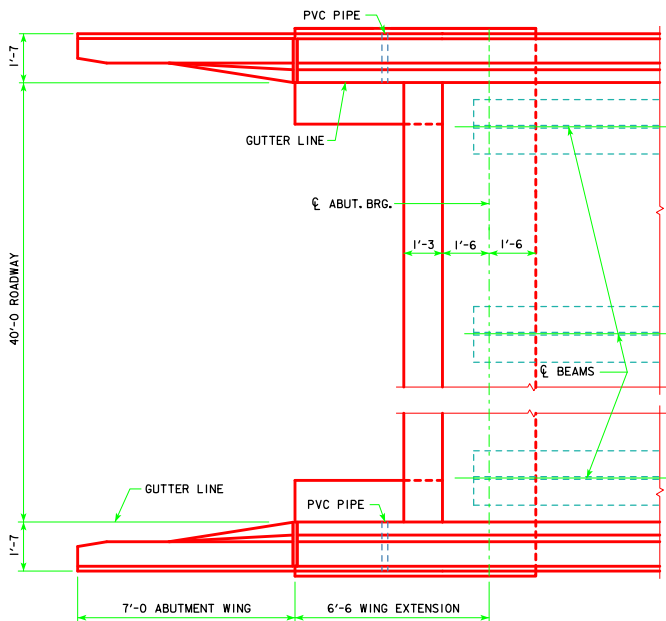

PART PLAN

(STEEL DIAPHRAGMS NOT SHOWN)



DETAIL "C"

LATEST REVISION DATE <i>Norman E. McQuinn</i> APPROVED BY BRIDGE ENGINEER		
	STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES ROLLED STEEL BEAM BRIDGES OCTOBER, 2014	
	LONGITUDINAL SECTION 0° SKEW	RS40-020-14