



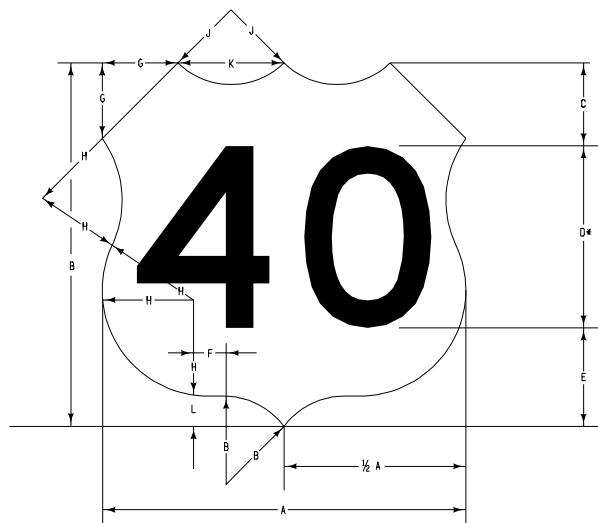

* Optically space numerals about vertical centerline

SIGN	DIMENSIONS (INCHES)										
	A	B	C	D	E	F	G	H	J	K	L
1,2-Digits	24	24	5½	120	5½	1	5	7	5	7	2
1,2-Digits	36	36	8¼	180	9¾	1½	7½	10½	7½	10½	3
3-Digits	30	24	5½	120	6½	4	5	7	9	10	2
3-Digits	45	36	8¼	180	9¾	5½	7½	10½	13½	15	3

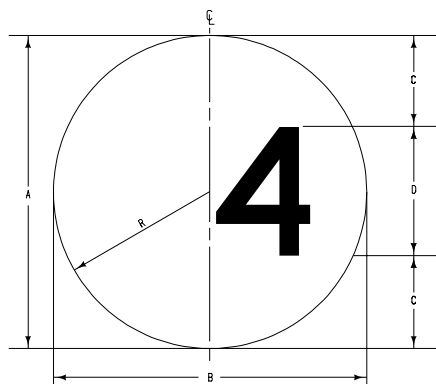

	6" Numerals	10" Numerals	12" Numerals	15" Numerals
A	16	24	30	36
B	16	24	30	36
C	5	7	9	10½
D	1 or 2 digits 6" D	3 digits 6" C	1 or 2 digits 12" D	3 digits 10" D
R	8	12	15	18

For use on ground mounted or overhead signs.

Background for U.S. and Iowa Route Markers shall be smooth silver reflective sheeting. Route Marker numerals shall be black non-reflective sheeting.

Dimensions shall be to the nearest 1/8 inch.

REVISION

110-17-06

RD-43

SHEET 1 of 1

REVISIONS: Remove rivet hole information.

APPROVED BY DESIGN METHODS ENGINEER

U.S. AND STATE ROUTE MARKERS

FOR TYPE "B" GUIDE SIGNS