
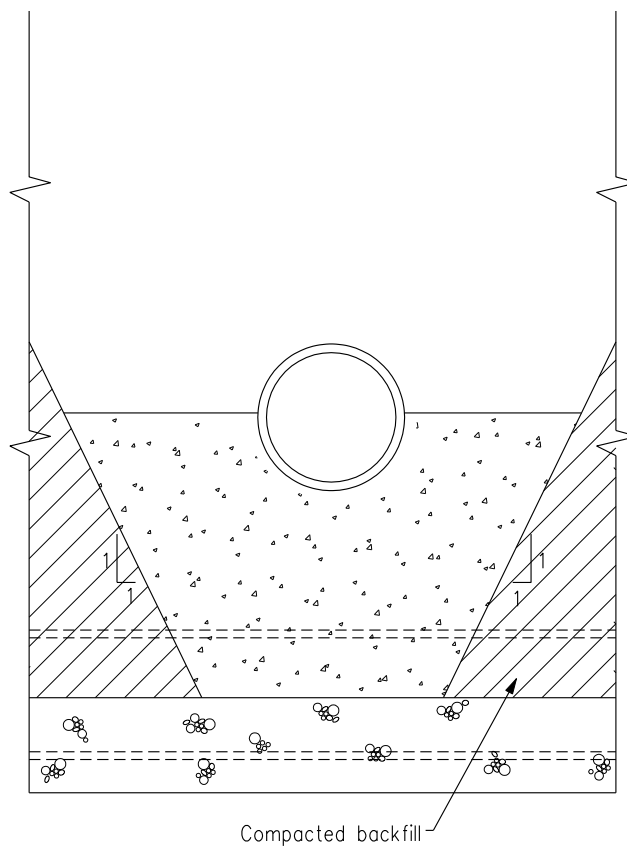


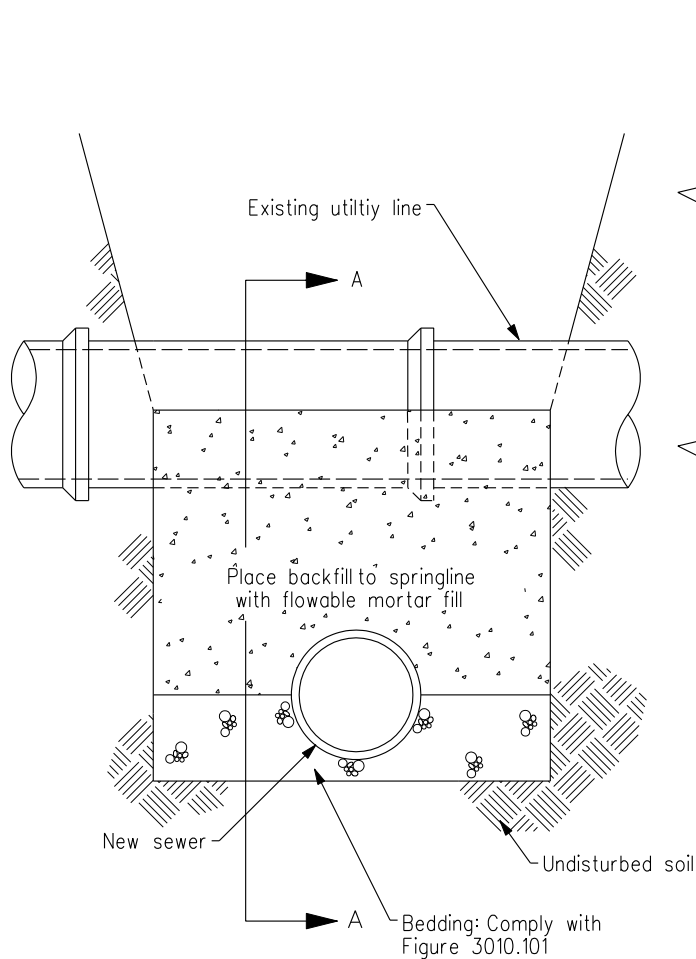

SECTION A-A

NOTES:

Flowable mortar utility line support to be used when new utility excavation is crossing under an existing utility line (sewer lines, water lines, gas lines, etc.) as directed by the Engineer.

Allow flowable mortar fill to cure a minimum of 24 hours before placing backfill material.

Trim uncompacted backfill material away from slopes before pouring flowable mortar.

Side slopes of flowable mortar fill to be 1:1 or greater. See Section A-A.

	REVISION	
	NEW	10/21/08
	FIGURE 3010.903	
	SHEET 1 OF 1	

FLOWABLE MORTAR FILL UTILITY LINE SUPPORT
--